

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**



The  
Patent  
Office

EPO - DG PCT/EP 00/09499

20 10. 2000


63



INVESTOR IN PEOPLE

EP 00/09499

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

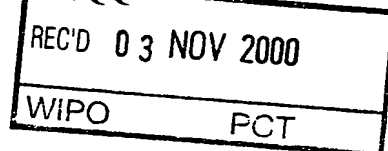


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

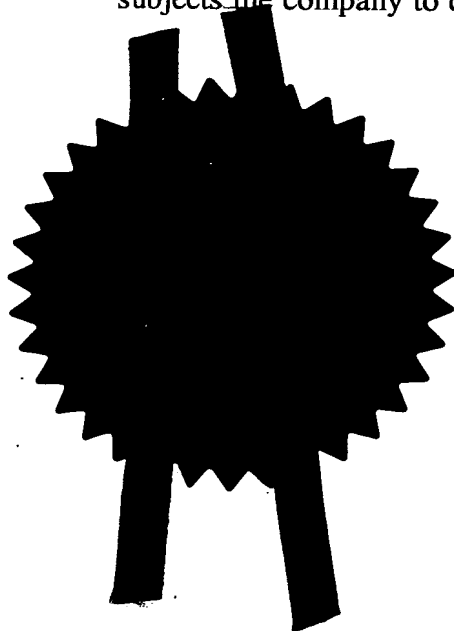

Signed

Dated 28 September 2000

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

An Executive Agency of the Department of Trade and Industry

Patents Act 1977  
(Rule 1)

The  
**Patent  
Office**

30SEP99 E480485-1 D02825  
1/7700 0:00 - 9923069.0

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference 100359/JPR

2. Patent application number 29 SEP 1999  
(The Patent Office will fill in this part) **9923069.0**

3. Full name, address and postcode of the or of each applicant (underline all surnames) NOKIA TELECOMMUNICATIONS OY  
KEILALAHDENTIE 4  
03260 ESPOO  
FINLAND

Patents ADP number (if you know it)

6332290004

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention ESTIMATING AN INDICATOR FOR A  
COMMUNICATION PATH

5. Name of your agent (if you have one) PAGE WHITE & FARRER  
54 DOUGHTY STREET  
LONDON  
WC1N 2LS  
UNITED KINGDOM  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body  
See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	12
Claim(s)	3
Abstract	-
Drawing(s)	2 + 2 <i>14</i>

10. If you are also filing any of the following, state how many against each item.

0

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	-
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*[Signature]*

29 September 1999

12. Name and daytime telephone number of person to contact in the United Kingdom.

JUHA-PEKKA RUUSKANEN  
0171 831 7929

#### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## ESTIMATING AN INDICATOR FOR A COMMUNICATION PATH

## Field of the Invention

5 The present invention relates to a communication path or link in a communication system, and in particular, but not exclusively, to estimation of an indicator for use in managing a communication path between at least two stations of a communication system.

10

## Background of the Invention

A communication network may comprise a cellular radio network consisting of cells. The cellular telecommunication networks typically operate in accordance with a given standard (or several standards) which sets out what the elements of the network are permitted to do and how that should be achieved. In most cases a cell can be defined as a certain area covered by one or several base transceiver stations (BTS) serving mobile stations (MS) within the cell via a radio interface. Each base-station has a radio transceiver capable of transmitting radio signals in downlink to and receiving radio signals in uplink from the area of a cell next to the base-station. By means of these signals the base station can communicate with the mobile station (MS) terminal in that cell, which itself includes a radio transceiver. Each base station may be connected to a base station controller (BSC) or to any other controller functionality provided by the cellular network. Thus a mobile station (MS) or similar user equipment (UE) within a cell of the system is continuously controlled by a node providing controller functionality. Examples of the network controller include said base station controller (BSC), a radio network controller (RNC) and a mobile switching center (MSC), but other control nodes may also be used for the

implementation of the network control functionality. The controller can be linked further to the public telephone network and/or to other networks such as packet data networks. By means of this system a user of the MS can establish a  
5 telephone call to the public network via a BS in whose cell the MS is located.

The location of the MS could be fixed (for example if it is providing radio communications for a fixed site) or the MS  
10 could be moveable (for example if it is a hand portable transceiver or "mobile phone"). When the MS is moveable it may move between cells of the cellular radio system. As it moves from one cell (the "old cell") to another cell (the "new cell") there is a need to hand it over from communication with  
15 the BS of the old cell to the BS of the new cell without dropping the call due to a break in communications between the mobile station and the network. This process is known as handover. A need can also arise to hand over a MS whose location is fixed, for example if atmospheric conditions  
20 affect its communications with the old BS and call quality can be improved by handing it over to another BS or if there is a need to free up capacity of the old BS.

In some cellular systems a mobile station is capable of making  
25 traffic communications with more than one base station at one time. This macrodiversity arrangement allows greater reliability of communications and can reduce the required transmission power. It also means that handovers between one base station and another can be performed in a gradual  
30 ("soft") rather than an abrupt ("hard") way.

The control node conventionally receives information relating to the quality of communications between the MS and the BSs and optionally other information such as data on the load on

at least some of the BSs. The control node uses this information to various functions. For example, by using this information the control node may determine which base station(s) an MS should communicate with and issues  
5 instructions to the BS and the MS accordingly.

The mobile station and/or the base station may measure and/or define several indicators or parameters concerning the communication path connection, such as quality of the received  
10 signal, signal levels (power) between the receiving and transmitting stations, distance between the stations and so on. The stations can be provided with appropriate means for defining a value for any parameter that can be measured for the interaction between the mobile station and any of the base  
15 stations or the radio transmission conditions in a cell.

In a cellular radio communication system, such as the GSM based systems, voice quality in a transmission over a communication path between a base station and a mobile station  
20 can be assessed based on a network indicator determined for the connection. Corresponding indicators may be defined both in uplink and downlink.

Currently the most commonly used quality parameter or  
25 indicator is so called Bit Error Ratio (BER), which is used e.g. in the GSM (Global System for Mobile) based network systems. The BER is a measure defining the level of quality for data transmission expressed as the relationship between erroneous bits and the total number of transmitted bits. The  
30 BER can be defined e.g. by sending a known bit pattern and counting the number of incorrectly received bits in the receiver.

A problem with the BER is that it measures the rate of the bit errors before an error correction mechanism. Therefore it does not take any improvements possibly produced by the error correction mechanism into the connection quality. If the  
5 functionality and/or efficiency of the error correction mechanism changes during the operation of the system, the BER values may no longer provide reliable information for assessing the quality of the transmission. The reliability of the BER based quality estimations may also become poorer due  
10 to new functionalities introduced into the network. The new functionalities could be such as Frequency Hopping or dynamic Channel Coding.

The inventor of the present invention has identified that  
15 frame erasure ratio (FER) could form a network indicator that could be used for the transmission quality estimation and that by using FER at least some of the problems of the BER could be avoided. In general, the FER represents the percentage of frames being dropped due to high number of non corrected bit  
20 errors in the frame. The FER can be a measurement of the results of 3-bit cyclic redundancy check for speech channels that is made along with a bad frame indicator (BFI). For signalling channels the FER is a measurement of errors in the block code used for the transmission.

25 A problem with the FER is that the current terminals do not report downlink FER to the network. There is no appropriate solution to manage the current terminals in a system that may base the connection control to an indicator such as the FER.  
30 It would thus be desirable to be able to define the FER or a similar network indicator by some other means than by receiving information of the indicator from a terminal that received the transmission.



## Summary of the Invention

It is an aim of the embodiment of the present invention to address one or several of the above problems.

5

According to one aspect of the present invention, there is provided a method in a communication system for estimating a network indicator of a communication path between a first station and a second station comprising:

10       determining at the second station a first indicator of the communication path in a direction from the first station to the second station;

          determining at the first station a second indicator of the communication path in a direction from the second station to the first station, said second indicator associating to a  
15       corresponding feature of the communication path than said first indicator;

          determining at the second station a third indicator of the communication path in the direction from the first station to the second station; and  
20

          estimating the network indicator of the communication path in the direction from the second station to the first station based on the determined first, second and third indicators.

25

According to another aspect of the present invention there is provided a communication system comprising a first station; a second station; a communication path between the first and the second stations; a measurement unit at the second station for  
30       determining a first indicator of the communication path in a direction from the first station to the second station; a measurement unit at the first station for determining a second indicator of the communication path in a direction from the second station to the first station, said second indicator

associating to a corresponding feature of the communication path than said first indicator; a measurement unit at the second station for determining a third indicator of the communication path in the direction from the first station to the second station; and control unit for estimating a further indicator of the communication path based on the determined first, second and third indicators.

According to further aspects the second station comprises a base station of a cellular communication system, the first station comprises a mobile station of the cellular communication system, the communication path comprises a radio link between the stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator comprises a bit error ratio in downlink direction; the third indicator comprises a frame erasure ratio in uplink direction; and the network indicator to be estimated comprises a frame erasure ratio in downlink direction.

The estimated network indicator may be used for assessing the quality of the communication path.

The network indicator may be obtained based on a correlation between the first indicator, the second indicator and the third indicator. The network indicator may be obtained by multiplying said second indicator by the third indicators and dividing the result by the first indicator.

Information about the first indicator, the second indicator and the third indicator may be passed to a controller of the communication system and computing the network indicator by the controller.

Brief Description of Drawings

For better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

5        Figure 1 shows schematically the configuration of a part of a typical cellular radio telecommunications network;

Figure 2 is a more detailed illustration of a mobile station and base station pair;

10        Figure 3 is a flowchart illustrating the operation of one embodiment of the present invention.

#### Description of Preferred Embodiments of the Invention

15        The present reporting method and associated apparatus will be described below with general reference to the GSM system, but it will be understood that the method is analogously applicable to provide enhanced parameter estimation in other telecommunications systems.

20        Reference is made to Figure 1 illustrating one system in which the embodiments of the invention may be employed. The exemplifying system is a mobile radio communication system allowing a plurality of mobile stations MS1, MS2, MS3 to communicate with a base (transceiver) station BTS in a common  
25        cell via respective channels CH1, CH2, CH3. Although not shown, the mobile stations may also move from one cell to another cell. The radio communication between a transmitting station and a receiving station may be implemented in any appropriate manner and may be based on any communication  
30        standard. Therefore the communication path as such will not be described in more detail herein. It is sufficient to note that each base transceiver station (BTS) is arranged to transmit signals via a radio interface or link to and receive signals from the mobile stations MS located in a cell associated with

the given base transceiver station. Likewise, each mobile station MS is able to transmit signals to and receive signals via a radio interface or link from the base transceiver station BTS.

5

The base station is connected to a controller, which in one form of the exemplifying GSM system comprises a base station controller (BSC). The BSC may be connected further to a Mobile Switching Centre (MSC; not shown). In the described embodiment the BSC is used as a radio network controller. However, in  
10 some arrangements the MSC could be used for controlling one or several base stations. In some embodiment the BSC between the MSC and the base station may also be omitted. The network controller functionality is for controlling its service area,  
15 i.e. the cells and base stations connected to it. It is noted that typically more than one network controller is provided in a network. The network controller is also connected further to other elements or parts of the telecommunications network system via a suitable linking or gateway apparatus, such as  
20 Gateway Mobile Switching Centre (GMSC; not shown).

The implementation of the basic communication formatting between the mobile station, the base station and the controller in GSM systems is known, and will thus not be  
25 discussed in more detail herein. It is sufficient to note that the interface may comprise channels in both uplink and downlink directions between the mobile station in the cell associated with a given base station and that the information sent to and from the mobile station may be sent in any  
30 suitable format. The information may include, for example, an identification of a mobile station in a message sent from the mobile station identifying the particular mobile station (for instance, MS ID and/or IMSI (Mobile Station Identity and/or International Mobile Subscriber Identity, respectively)).

The mobile stations and the base station are arranged to perform measurements in order to be able to provide predefined information to the controller. These measurements may be of any appropriate feature that is in some way indicative of the quality or some other characteristics of traffic communications over the link between the mobile station and the base station. The information may comprise various parameters or indicators, such as an indicator from which it is possible to estimate the quality of the connection. Examples are signal strength of the base station for the cell as received at the mobile station and vice versa, error rate of communications (e.g. bit error rate or frame error rate), or delay or distortion of such communications. The information of the measurement results may then be used e.g. by the controller functionality. For example, the controller may use the information to decide an appropriate cell that can be selected for serving the mobile station.

Figure 2 shows in more detail a mobile station and base station pair capable of operation in the system of figure 1. The mobile station, which in this case is a cellular telephone, includes a radio transceiver unit 20, a measurement unit 21 and a control unit 22. The base station includes correspondingly a radio transceiver unit 23, a measurement unit 24 and a control unit 25. The controller BSC is shown to include a control unit 26 for accomplishing computations of the embodiments of the invention. These units may be implemented as distinct units as illustrated in figure 2 or by software running on common hardware.

The transceiver 20 of the mobile station transmits traffic signals to and receives traffic signals from one or more base stations to which the mobile station is currently attached.

The transmissions to and from the mobile station are split into multiframe, each of which occupies a certain predefined time, e.g. 480ms. The transceiver may also receives signals from other base stations, typically signals on one or more  
5 broadcast channels e.g. BCCH. These signals as well as signals received from the base station(s) to which the mobile station is attached are directed to the measurement unit 21. The measurement unit measures a predefined feature of those signals as mentioned above - for example the bit error rate  
10 (BER) of the received signal. The measurement results are passed to the control unit 22 which generates appropriate measurement reports in accordance with the used standard. The measurement reports are then transmitted to the base station(s) to which the mobile station is attached. The  
15 measurement reports are then used by the network, e.g. to make handover or load balancing decisions.

The mobile station MS is arranged to measure and report a downlink bit error rate (DL BER) for the signals received from  
20 the base station BTS to the controller BSC via the base station BTS by an appropriate measurement report mechanism. For example, in the GSM networks the BER is reported by the mobiles to the system as RXQUAL message (received transmission quality). The base station is arranged to measure an uplink  
25 bit error rate (UL BER) for the transmission received from the mobile station. The UL BER is reported to the BSC in order to be used for statistics and the handover and power control mechanisms. The UL BER may also be used in one of embodiments of the invention, as will be described later in this  
30 specification. The base station BTS is also arranged to determine a uplink erasure ration (UL FER) based on Bad Frame Indicator (BFI) calculations.

According to an embodiment of the invention the UL FER, UL BER and DL BER are used to estimate the DL FER. In this embodiment the estimation is based on the realisation that the changes and/or new features, such as Frequency Hopping and Dynamic Channel Coding, have the same effect over the Error Correction mechanism in the uplink and downlink directions. Therefore the change in the indicators is also equivalent. This means that the correlation between the BER and the FER in the Uplink will be the equivalent to the corresponding correlation of the BER and the FER in the downlink. Thus by calculating a BER-FER correlation in up-link the DL FER can be derived from by means of the DL BER. This can be exemplified by the equation:

$$\text{DL FER} = \text{DL BER} \times \text{UL FER} / \text{UL BER}$$

15

The required calculations for the estimation may be accomplished in the network controller, such as the BSC. According to one alternative the calculations are accomplished in the base station by the control unit 25 thereof.

20

The above embodiment enables use of the FER even with terminals that do not support FER reporting, and thereby the embodiments enable FER based quality estimation even when such mobile stations are used.

25

According to an alternative the mobile station determined two indicators for the connection quality and is provided with an indicator (e.g. UL BER) determined by the base station. In this embodiment the mobile station will then determine the "missing" indicator from the comparison of the three measured indicators. In other words, in this case the above presented exemplifying equation would be:

30

$$\text{UL FER} = \text{UL BER} \times \text{DL FER} / \text{DL BER}$$

It should be appreciated that whilst embodiments of the present invention have been described in relation to mobile stations, embodiments of the present invention are applicable  
5 to any other suitable type of user equipment, including terminals with fixed line connections.

It is also noted herein that while the above describes one exemplifying embodiment of the invention, there are several  
10 variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.



## Claims

1. A method in a communication system for estimating a network indicator of a communication path between a first station and a second station comprising:

determining at the second station a first indicator of the communication path in a direction from the first station to the second station;

determining at the first station a second indicator of the communication path in a direction from the second station to the first station, said second indicator associating to a corresponding feature of the communication path than said first indicator;

determining at the second station a third indicator of the communication path in the direction from the first station to the second station; and

estimating the network indicator of the communication path in the direction from the second station to the first station based on the determined first, second and third indicators.

2. A method according to claim 1, wherein the second station comprises a base station of a cellular communication system, the first station comprises a mobile station of the cellular communication system, the communication path comprises a radio link between the stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator comprises a bit error ratio in downlink direction; the third indicator comprises a frame erasure ratio in uplink direction; and the network indicator to be estimated comprises a frame erasure ratio in downlink direction.

3. A method according to claim 1 or 2, wherein the estimated network indicator is used for assessing the quality of the communication path.
- 5 4. A method according to claim 3, wherein voice quality of the transmission via the communication path is assessed.
5. A method according to any of the preceding claims, wherein the network indicator is obtained based on a  
10 correlation between the first indicator, the second indicator and the third indicator.
6. A method according to claim 5, wherein the network indicator is obtained by multiplying said second indicator by  
15 the third indicators and dividing the result by the first indicator.
7. A method according to any of the preceding claims, comprising passing information about the first indicator, the  
20 second indicator and the third indicator to a controller of the communication system and computing the network indicator by the controller.
8. A communication system comprising:  
25 a first station;  
a second station;  
a communication path between the first and the second stations;  
a measurement unit at the second station for determining  
30 a first indicator of the communication path in a direction from the first station to the second station;  
a measurement unit at the first station for determining a second indicator of the communication path in a direction from the second station to the first station, said second indicator

associating to a corresponding feature of the communication path than said first indicator;

a measurement unit at the second station for determining a third indicator of the communication path in the direction  
5 from the first station to the second station; and

control unit for estimating a further indicator of the communication path based on the determined first, second and third indicators.

10 9. A communication system according to claim 8, wherein the second station comprises a base station of a cellular communication system, the first station comprises a mobile station of the cellular communication system, the communication path comprises a radio link between the  
15 stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator comprises a bit error ratio in downlink direction; the third indicator comprises a frame erasure ratio in uplink direction, and the further indicator comprises a frame erasure ratio in downlink  
20 direction.

10. A communication system according to claim 8 or 9, wherein the estimated indicator is used for assessing the quality of the communication path.

25 11. A communication system according to any of claims 8 to 10, wherein the control unit is arranged to correlate the first indicator, the second indicator and the third indicator for obtaining the further indicator.

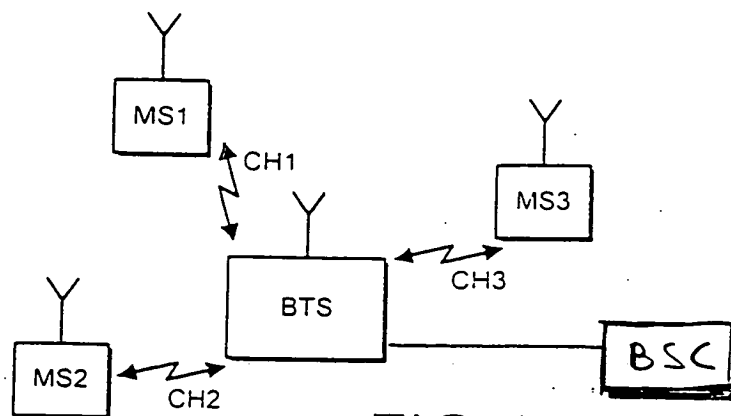


FIG. 1

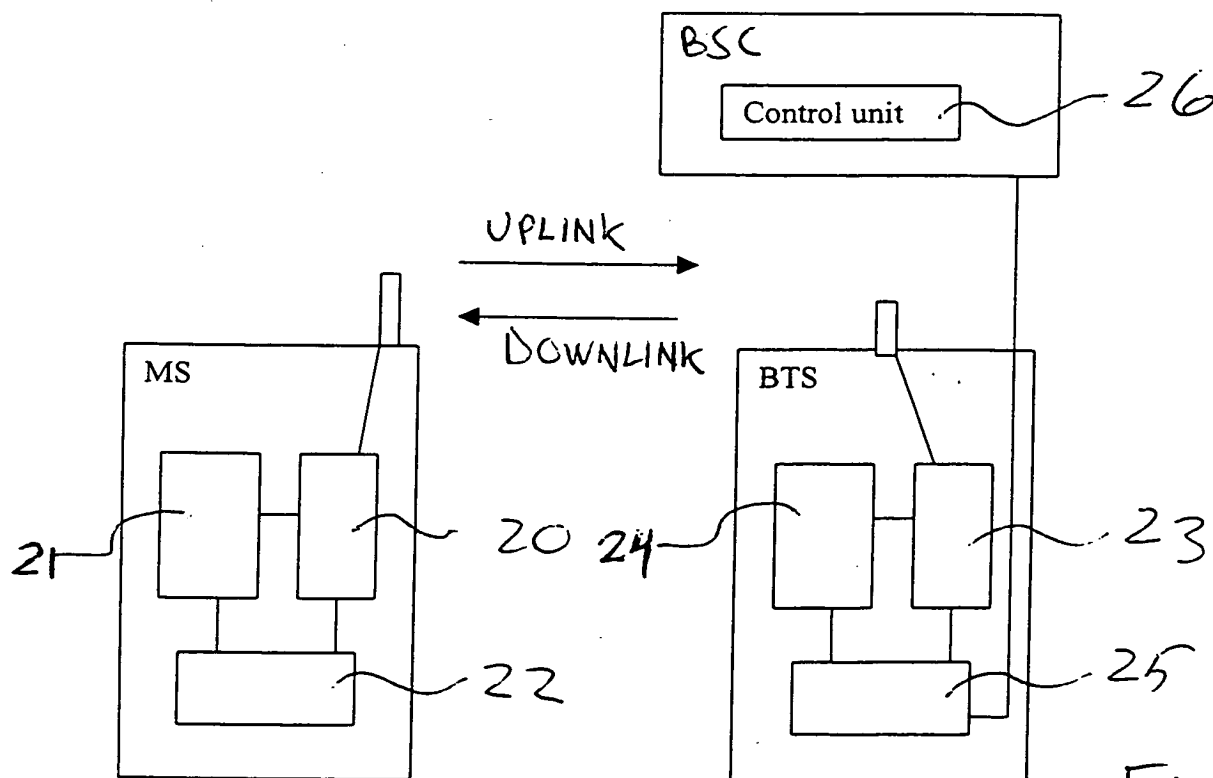


Fig. 2

Determine a BER for the uplink / Determine a BER for the downlink / Determine a FER for the uplink



Transmit the determined information to a controller



Estimate at the controller a FER for the downlink based on the received BERs and the FER

Fig. 3